

Perma-Clad® metal panels are designed with the understanding of the unique needs in the post-frame light commercial and residential markets. Perma-Clad® offers excellent durability in all types of weather including rain, wind and snow, making this panel the panel of choice for all climates. Perma-Clad® can be installed over a solid, waterproofed deck when used as a roof panel and is available in cut-to-the-inch lengths.

## Product Specifications

**Applications:** Roof and Wall

**Coverage Widths:** 36"

**Rib Spacing:** 9" on center



**Rib Height:** 5/8"

**Panel Attachment:** Exposed Fastening System

**Gauges:** 29 (standard); 26 (optional)

**Finishes:** Smooth (standard)

**Coatings:** Galvalume Plus®, Signature® 200

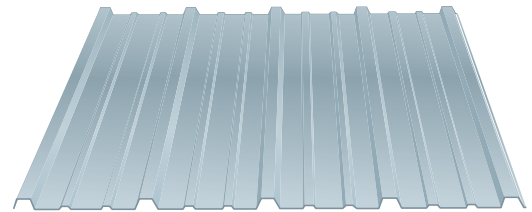

## Features and Benefits

UL 580 rating is available, as well as UL 263 for internal fire and the UL 2218 Class 4 impact rating.



For a complete line of trim and accessories, please refer to our Trim and Accessories catalog.

[ABCMETAL.com](http://ABCMETAL.com)

Adel, GA	Ennis, TX	Lubbock, TX	Memphis, TN	Nicholasville, KY	Omaha, NE	Oskaloosa, IA	Phoenix, AZ	Rome, NY	Salt Lake City, UT
800.877.8709	800.345.0044	800.481.3035	800.877.8709	800.877.8709	800.345.0044	800.345.0044	800.481.3035	800.544.2651	800.481.3035



CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
<b>ENVIRONMENTAL</b>	Impact Resistance	UL 2218	Determines Impact Resistance of prepared Roof Covering Materials	Class 4 Rating
<b>FIRE RESISTANCE</b>	Room Fire Performance	UL 263	Standard for Fire Tests of Building Construction and Materials	For use in Design Nos. P225, P227, P230, P237, P265, P268, P508, P510, P512, P701, P711, P720, P722, P726, P731, P734, P801, P815, P819.
<b>ROOF LISTINGS</b>	Roof Performance -Underwriters Laboratories	UL 580	Determines the uplift resistance of roof assemblies consisting of the roof and roof coverings materials	Class 90 Rating - Construction Number 561