

Structural stability that performs year after year is the standard with ABC's Regal Rib® metal panel. Chosen for its aesthetic elegance, Regal Rib® provides impressive lasting capabilities while maintaining the dependable strength that is needed in a rural environment.

Product Specifications

Applications: Roof

Coverage Widths: 36"

Rib Spacing: 9"



Rib Height: 5/8"

Panel Attachment: Exposed Fastener Metal Panel

Gauges: 29, 26

Finishes: Siliconized Polyester

Coatings: Galvalume Plus®, Signature® 200

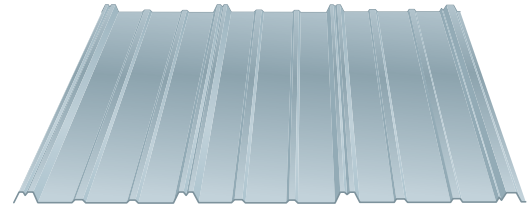

For a complete line of trim and accessories, please refer to our Trim and Accessories catalog.

ABCMETAL.com

Adel, GA	Ennis, TX	Lubbock, TX	Memphis, TN	Nicholasville, KY	Omaha, NE	Oskaloosa, IA	Phoenix, AZ	Rome, NY	Salt Lake City, UT
800.877.8709	800.345.0044	800.481.3035	800.877.8709	800.877.8709	800.345.0044	800.345.0044	800.481.3035	800.544.2651	800.481.3035

Regal Rib®

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
ENVIRONMENTAL	Impact Resistance	UL 2218	Determines Impact Resistance of prepared Roof Covering Materials	Class 4 Rating
FIRE RESISTANCE	Room Fire Performance	UL 790	Standard for Standard Test Methods for Fire Tests of Roof Coverings	See Class A Fire Rating Data Sheet
STRUCTURAL	Uplift Resistance	AISI S100	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Section Properties and Allowable Load Table Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section